


NEO 5 IP

Installation loudspeakers with high IP rating

With an IP protection factor of 65, **NEO 5 IP** guarantees installations in outdoors with heavy rains, which is a very demanded feature for this kind of surface mounted loudspeakers. Technical specifications are identical to NEO 5 except for the rear connection which has been replaced with a cable with the different power taps.

Sold in pairs (two passive boxes).

Technical data	NEO 5 IP
Type:	2-way passive loudspeaker.
IP rating:	IP 65
Components:	5 ¼ "woofer + 0.5" TWT.
Power (100 V line):	16 W (625 Ω) / 8 W (1k25 Ω) / 4 W (2k5 Ω) / 2 W (5 k).
(*) Power (70 V line):	8 W (612 Ω) / 4 W (1k22 Ω) / 2 W (2k45 Ω) / 1 W (4k9 k Ω).
Power (8 ohm):	40 W, 8 Ω .
Input Connector:	Euroblock.
Sensitivity (1W/1m):	91 dB.
Max SPL:	107 dB.
Frequency response:	60 Hz - 20 kHz.
RAL color:	RAL 9003 (white) / 9004 (black).
Material (enclosure):	Polypropylene ABS plastic.
Material (grille):	Aluminium.
Dimensions (HxWxD):	171 x 244 x 166 mm.
Weight:	2.4 kg each.

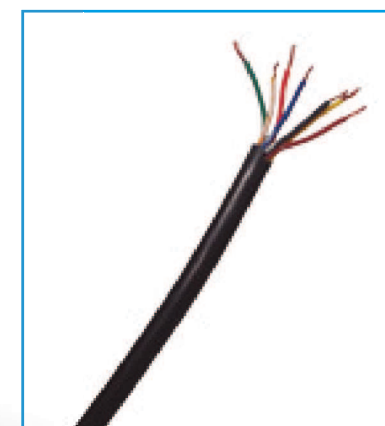

*Available in black and white colour.